






# Flat top crane TCP7427

## TCP7427

## 18t

DEYING®  
德英

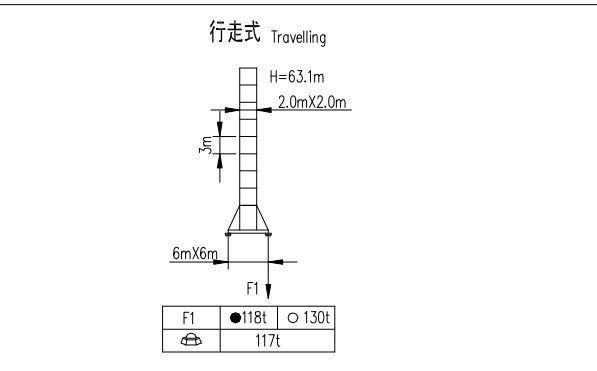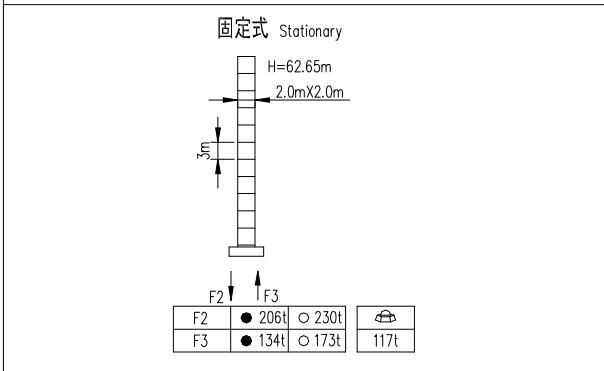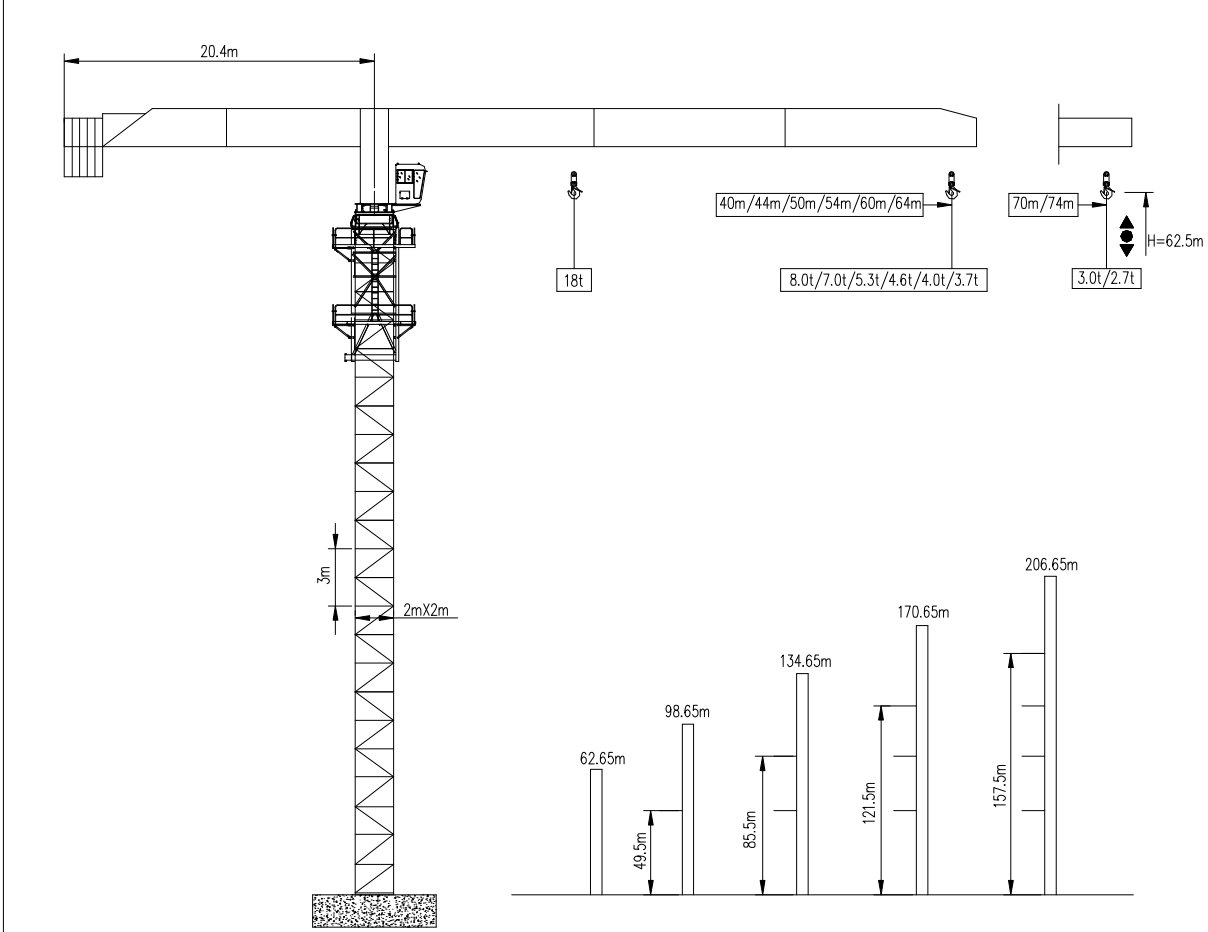




F 反力 Reaction	● 工作状态 in service	☉ 自重 without load and ballast with the longest jib and maximum height
	○ 非工作状态 out of service	

## 载荷特性 Load Capacity

臂长 jib	倍率 fall	R(max) m	C(max) t	30	34	40	44	50	54	60	64	70	74
74	IV	14.3	18.00	7.01	6.16	5.05	4.48	3.80	3.43	2.98	2.72	2.39	2.20
	II	25.9	9.00	7.66	6.66	5.55	4.98	4.30	3.93	3.48	3.22	2.89	2.70
70	IV	14.6	18.00	7.42	6.39	5.25	4.66	3.96	3.58	3.11	2.84	2.50	
	II	26.7	9.00	7.92	6.89	5.75	5.16	4.46	4.08	3.61	3.34	3.00	
64	IV	15.7	18.00	8.30	7.08	5.83	5.19	4.42	4.01	3.49	3.20		
	II	29.1	9.00	8.80	7.58	6.33	5.69	4.92	4.51	3.99	3.70		
60	IV	15.7	18.00	8.30	7.36	5.84	5.20	4.43	4.02	3.50			
	II	29.1	9.00	8.80	7.86	6.34	5.70	4.93	4.52	4.00			
54	IV	15.7	18.00	8.40	7.23	5.95	5.30	4.52	4.10				
	II	29.1	9.00	8.90	7.73	6.45	5.80	5.02	4.60				
50	IV	16.3	18.00	8.60	7.64	6.30	5.62	4.80					
	II	31.0	9.00	9.00	8.14	6.80	6.12	5.30					
44	IV	18.2	18.00	10.10	8.75	7.28	6.50						
	II	35.0	9.00	9.00	9.00	7.78	7.00						
40	IV	18.5	18.00	10.35	9.00	7.50							
	II	35.9	9.00	9.00	9.00	8.00							

## 机构特性 Mechanism specification

起升 Hoisting 							KW		
	m/min	100	41	11	50	21.5	5.5		75
	t	1.5	4.5	9.0	3.0	9.0	18.0		

变幅 Trolleying 	0-83m/min	5.5
---	-----------	-----

回转 Slewing 	r/min	0~0.8	4x5.5
--	-------	-------	-------

电源 Power supply	~380V/50Hz
-----------------	------------