


Bucket Wheel Stacker & Reclaimer

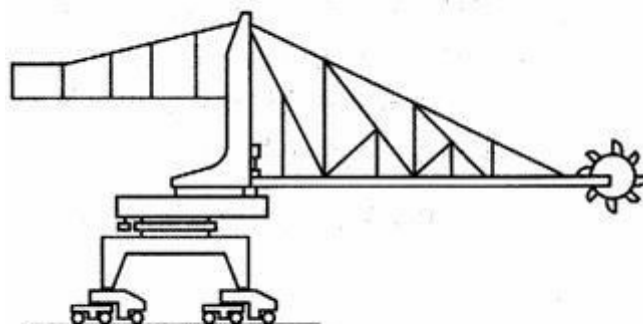

Bucket Wheel Stacker and Reclaimer

Bucket wheel stacker & reclaimer

| | | Unit | LDQ 1600 2400/35 | LDQK 600 1000/25 | LDQZ 800 1200/37.5 | LDQK 1100 1200/25 | LDQZ 1200 1600/40 | LDQK 1250 2000/3 0 | LDQZ1 500 1500/4 5 | LDQK 1600 2500/3 0 | LDQZ 2500 7500/55 |
|--------------------------|----------------|------------------|------------------------|------------------------|--------------------------|-------------------------|-------------------------|-----------------------------|-----------------------------|-----------------------------|-------------------------|
| Production capacity | Stack | t/h | 2400 | 1000 | 1200 | 1200 | 1600 | 2000 | 1500 | 2500 | 7500 |
| | Reclaim | t/h | 1600 | 600 | 800 | 1100 | 1200 | 1250 | 1500 | 1600 | 2500 |
| Stacker & Reclaimer | Rail above | m | 12 | 10 | 12 | 11 | 11 | 12 | 12 | 12 | 12 |
| | Rail below | | | | | | | | | | |
| Material | Capacity | m | 2 | 1 | 1 | 1 | 1 | 1.5 | 1 | 1.5 | 2 |
| | Granularity | | | | | | | | | | |
| Slewing mechanism | Slewing radius | t/h ³ | 2.2 | 1.6~3.0 | 0.5~2.2 | 0.5~2.5 | 2.2 | 1.8~2.4 | 2.2 | 0.8~1 | 2.2 |
| | Slewing angle | mm | <100 | <100 | <200 | <100 | <50 | <100 | <100 | <300 | <100 |
| Belt convey of front jib | Belt width | m | 35 | 25 | 37.5 | 25 | 40 | 30 | 40 | 30 | 55 |
| | Belt speed | (^o) | +(-)110 | +(-)110 | +(-)110 | +(-)110 | +(-)110 | +(-)110 | +(-)110 | +(-)110 | +(-)110 |
| Rail distance | | m | 8 | 6 | 6 | 6 | 8 | 7 | 8 | 7 | 9 |
| Maximum wheel pressure | | kn | 268 | 250 | 230 | 250 | 250 | 250 | 250 | 250 | 250 |
| Transfer speed | | m/min | 30 | 30 | 30 | 30 | 30 | 30 | 20 | 30 | 20 |
| Work speed | | min | 7 | 5 | 7 | 7 | 7 | 7 | 7 | 7 | 7 |
| Recommended | | kg/m | P50 | P50 | P50 | P50 | P50 | P50 | P50 | P50 | P100 |
| Installed power | Total power | kw | 472 | 222 | 285 | 220 | 380 | 300 | 320 | 330 | 690 |
| | Usual | kw | 440 | 148 | 220 | 160 | 330 | 220 | 300 | 280 | 670 |

| | | | | | | | | | | | |
|-------------------|-------------------|--|-----------------------------------|-----|------|------|------|-------|------|-------|-------|
| | power | | | | | | | | | | |
| Electrical source | Voltage | v | 10000 | 380 | 6000 | 6000 | 6000 | 10000 | 6000 | 10000 | 10000 |
| | Power supply mode | v | Power cable wound roll, side-wire | | | | | | | | |
| Control mode | | Communication cable wound roll, wireless | | | | | | | | | |

[Bucket Wheel Stacker & Reclaimer](#)

Download Bucket Wheel Stacker & Reclaimer Data sheet :  

Bucket Wheel Stacker and Reclaimer is a kind of ideal effective equipment for continuously handing a lot of bulk materials in modernized industry, and it is widely used for stacking and reclaiming bulk materials (mine, coal, coke and sand) in harbour, dock, iron-steel plant, coking factory, coal storage and power station.

[China De-Ying Products](#)

We are the leading Chinese supplier for **tower crane** and **top slewing crane**, **Bucket Wheel Stacker-Reclaimer**, **Stacker Reclaimer**, **Cement Machinery**, what has been exported to Saudi Arabia, Qatar, India, Vietnam, Iran, UAE, Costa Rica, Nigeria, Georgia, and so on. Welcome the potential [tower crane dealer and dealership](#) in the foreign market for further cooperation.

If you want to buy tower crane, welcome for your inquiry. We(Tower crane manufacturer) will supply the high quality tower crane of reasonable price.

| | | | |
|--------------------------------------|--|--|--|
| Tower Crane | Topless tower crane | Luffing crane | Opencast Mining Equipment |
| Bucket wheel Stacker | Tower crane dealer | tower crane supplier | Tower crane dealership |
| Plate Feeder | Bucket wheel Reclaimer | Tower crane manufacturer | bucket wheel stacker reclaimer |